


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"  
(102mm)

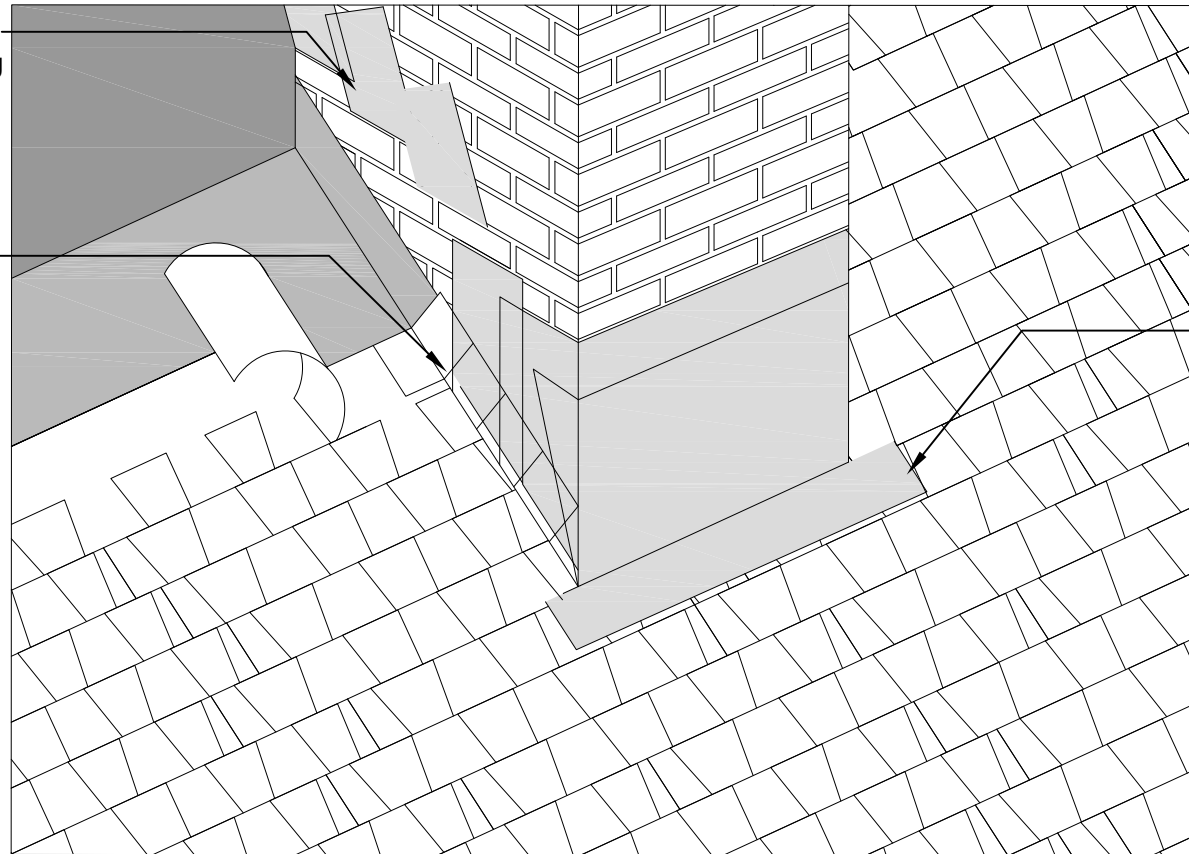

1 Campus Drive  
Parsippany, NJ 07054  
www.gaf.com

BRAND SERIES

**TIMBERLINE  
SERIES**  
Lifetime Shingles

REVISION DATE

9-01-14

SCALE

N.T.S

## CHIMNEY FLASHING DETAIL

DETAIL NUMBER

**07**

DETAIL REFERENCE

**SS-TS**